

PME2030



Main Features

| | | |
|----------------------|------------|-----|
| Frequency | Hz | 50 |
| Voltage | V | 400 |
| Power factor | cos ϕ | 0.8 |
| Phase and connection | | 3 |

Power Rating

| | | |
|-------------------|-----|---------|
| Standby power LTP | kVA | 2040.67 |
| Standby power LTP | kW | 1632.54 |
| Prime power PRP | kVA | 1855.93 |
| Prime power PRP | kW | 1484.74 |

Ratings definition (According to standard ISO8528 1:2005)

PRP - Prime Power:


It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70 % of the prime power.

LTP - Limited-Time running Power:

It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 h of operation per year (whose no more than 300 for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

Engine specifications

| | | |
|-------------------------------------|-----------------|-------|
| Engine manufacturer | Perkins | |
| Model | 4016-TAG1A | |
| Version | 50 Hz | |
| [50Hz] Exhaust emission level | Unregulated | |
| Engine cooling system | Water | |
| Nr. of cylinder and disposition | 16 V angle | |
| Displacement | cm ³ | 61123 |
| Aspiration | Turbocharged | |
| Speed governor | Electronic | |
| Operating Speed-Nominal | rpm | 1500 |
| Prime gross power PRP | kW | 1588 |
| Maximum gross power LTP | kW | 1741 |
| Oil capacity | l | 214 |
| Lube oil consumption @ PRP (max) | % | 0.2 |
| Coolant capacity | l | 316 |
| Fuel | Diesel | |
| Specific fuel consumption @ 75% PRP | g/kWh | 198 |
| Specific fuel consumption @ PRP | g/kWh | 205 |
| Starting system | Electric | |
| Starting engine capability | kW | 16.4 |
| Electric circuit | V | 24 |

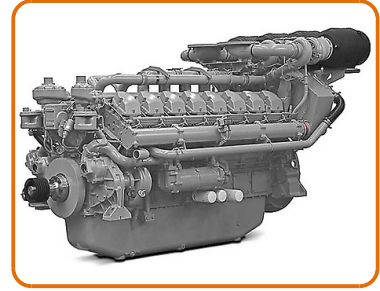

Fuel system:

- Unit fuel injectors with lift pump and hand stop control
- Governor to ISO 8528-5 class G3 with isochronous
- Full-flow spin-on fuel oil filters
- Closed fuel system

Lube oil system:

- Recommended lubricating oil to conform with the specification of API CG4 15W/40
- Low oil pressure switch
- Wet sump with filler and dipstick

Lubrication oil filters:

- Twin low oil pressure shutdown switches
- Full-flow spin-on oil filters
- Engine jacket water/lube oil temperature stabilize

Combustion air system:

- Mounted air filter Fuel system
- Direct fuel injection system, fuel lift pump
- Fuel cooler

Cooling system:

- Gear driven circulating pump
- Twin thermostats
- Powder coated radiator assemblies comprising: water radiator; air charge cooled radiator;
- Air inlet restriction at maximum power (Nominal) : 19.3 mbar

Alternator Specifications

| | | |
|---------------------------|-------------|------|
| Alternator | Mecc Alte | |
| Model | ECO46-1LN/4 | |
| Voltage | V | 400 |
| Frequency | Hz | 50 |
| Power factor | cos ϕ | 0.8 |
| Voltage regulation system | Electronic | |
| Poles | 4 | |
| Type | Brushless | |
| Standard AVR | DER1 | |
| Voltage tolerance | % | 1 |
| Efficiency @ 75% load | % | 96.8 |
| Class | H | |
| IP protection | 21 | |
| Phases | 3 | |



Mechanical structure

Robust mechanical structure which permits easy access to the connections and components during routine maintenance check-ups.

Voltage regulator

Voltage regulation with DER 1. The digital DER 1 is a Digital controlled regulator, based on DSP (Digital Signal Processor) that combines function as Voltage Regulation and Alternator Protections and Diagnostic into a very small single board.

Voltage supply: 40Vac+270Vac

Maximum continuous output current: 4A_{dc}

Frequency range: 12Hz+72Hz

Single phase sensing automatic recognition

Average value of voltage regulation

Voltage regulation range (sensing) from 75Vac to 300Vac

Precision of voltage regulation: $\pm 1\%$ from no-load to nominal load in static condition, with any power factor and for frequency variations ranging from -5% to +20% of the nominal value.

Precision of voltage regulation: $\pm 0,5\%$ in stabilized conditions (load, temperature).

Transient voltage drop and overvoltage within $\pm 15\%$

Voltage recovery time within $\pm 3\%$ of the value set, in less than 300 msec.

Underspeed protection with adjustable threshold and slope

Overvoltage and undervoltage alarms

Excitation overcurrent protection with delayed intervention

Allarm conditions storage (type of alarm, number of events, duration of the last event, total time)

Memorization of the regulator operation time



Windings / Excitation system

Generator stator is wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches. MAUX (Standard): The MAUX MeccAlte Auxiliary Winding is a separate winding within the main stators that feeds the regulator. This winding enables to take an overload of 300% forced current (short circuit maintenance) for 20 seconds. This is ideal for motor starting requirements. PMAUX (optional): Alternator can be equipped with the optional PMAUX (Permanent Magnet Generator) which matches the performance and is capable of supporting both linear and distorted loads.

Insulation / Impregnation

Insulation is of class H standard. Impregnation is made with premium tropicalised epoxy resins by dipping and dripping. High voltage parts are impregnated by vacuum, so the insulation level is always very good. In the high-power models, the stator windings undergo a second insulation process. Grey protection is applied on the main and exciter stator to give enhanced protection.

Reference standards

Alternator manufactured according to , and complies with , the most common specification such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, CAN/CSA-C22.2 No14-95-No100-95.

Genset equipment

BASE FRAME:

Base frame made of welded steel profiles, complete with anti-vibration mountings properly sized.

The baseframe has a grounding point to connect all metal parts of the generating set and it provides a high structural strength.

ENGINE COMPLETE WITH:

- Liquids (no fuel)

MANUAL OIL DRAININ PUMP:

- Oil draining facilities

CONTAINER 40':

Soundproof Container made by monoblock structure and designed to satisfy the most disparate needs of the Customer.

Main feature are:

- Structure similar to shipping containers (upper and lower corner castings, monolithic structure, walls and roof made of corrugated steel sheet), making them particularly strong and suitable .
- High resistance to the atmospheric agents
- Polyester powder painting and automatic blasting SA 2.5
- Air inlet and exhaust openings air outlet for genset cooling
- It is foreseen space for housing the electrical panel, if necessary the control panel can be separated from alternator, in a dedicated room.
- The floor is made of textured sheeting reinforced with profiles at steady pace bent.
- Doors single or double swing , these are fixed by sturdy steel hinges and equipped with various systems of locks, such as lever bolt locks, panic bars etc.


SOUNDPROOF:

The walls, divisors and roof are self supporting and with high acoustic absorption.

They are produced in galvanized steel-sheet and subsequently painted with a galvanic deposition of polyester powder. Inside they are composed by a sheet of rock wool .



Exhaust silencers placed inside or outside the container depending on genset model.

Residual noise level of $70 \pm 3 \text{dB(A)}$ at 7 m

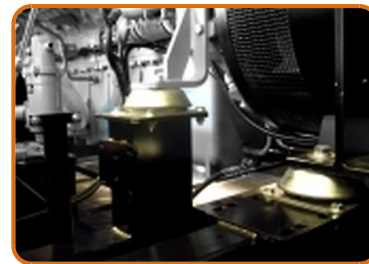

Genset Equipment - Basic Configurations Available:

| | | | |
|--|----|--|------|
| BAT – LEAD-ACID STARTING BATTERIES KIT | | | : |
| Battery | n | | 4 |
| Battery Capacity | Ah | | 220 |
| MBS - Manual Battery Switch | | | • |
| INTEGRATED FUEL TANK - VERSIONS AVAILABLE | | | : |
| IFT1 - Integrated Fuel Tank (steel) | l | | 500 |
| IFT2 - Integrated Fuel Tank (steel) | l | | 1000 |
| FBD - Fully bunded base frame | | | • |
| LDS - Leakage detection sensor (only with FBD) | | | • |
| FCV - Fuel Cut Off Valve | | | • |
| AFP - Automatic Fuel Pump | | | • |
| DFP - Double Automatic Fuel Pump | | | • |
| PHS - Coolant Pre-Heating System - available for models: | | | • |
| ALS - Automatic Lube Oil Top Up System with lube oil tank 100L | | | • |
| • : Supplement available | | | . |
| Other Configurations and-or special versions available on requests | | | . |

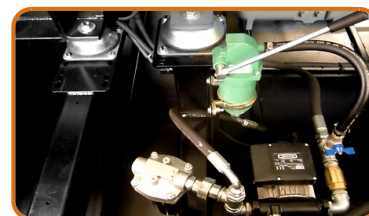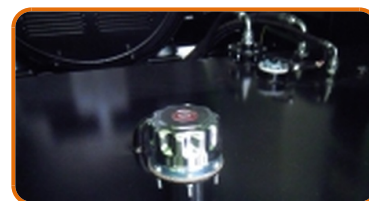

Dimensional data

| | | |
|------------|--------|-------|
| Length | (L) mm | 12190 |
| Width | (W) mm | 2438 |
| Height | (H) mm | 2896 |
| Dry weight | Kg | 22588 |



Consumption

| | | |
|-----------------------------|-----|--------|
| Fuel consumption @ 75% PRP | l/h | 283.18 |
| Fuel consumption @ 100% PRP | l/h | 387.55 |

Noise level

| | | |
|-----------------------------|-------|---------|
| Noise pressure level @ 7 mt | dB(A) | 77 +/-3 |
|-----------------------------|-------|---------|

Installation data

| | | |
|-------------------------------|---------------------|-----|
| Exhaust gas flow @ PRP | m ³ /min | 343 |
| Exhaust gas temperature @ LTP | °C | 439 |

Data Current

| | | |
|------------------|----|---------|
| Battery capacity | Ah | 220 |
| MAX current | A | 2945.55 |
| Circuit breaker | A | 3200 |

Control panel availability

| | |
|-------------------------|-----|
| AUTOMATIC CONTROL PANEL | ACP |
| MODULAR PARALLEL PANEL | MPP |

ACP - Automatic control panel

Mounted on the genset, complete with digital control unit for monitoring, control and protection of the generating set, protected through door with lockable handle

DIGITAL INSTRUMENTATION

- Generating set voltage (3 phases)
- Mains voltage
- Generating set frequency
- Generating set current (3 phases)
- Battery voltage
- Power (kVA - kW - kVAr)
- Power factor Cos ϕ
- Hours-counter
- Engine speed r.p.m.
- Fuel level (%)
- Engine temperature

COMMANDS AND OTHERS

- Four operation modes: OFF - Manual starting - Automatic starting - Automatic test
- Pushbutton for forcing Mains contactor or Genset contactor
- Push-buttons: start/stop, fault reset, up/down/page/enter selection
- Remote starting availability
- DC system disconnection switch
- Acoustic alarm
- Automatic battery charger
- RS232 Communication port
- Settable PASSWORD for protection level

PROTECTIONS WITH ALARM


- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage

PROTECTIONS WITH SHUTDOWN

- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protection: under/over voltage, overload, under/over battery voltage, battery charger failure
- Earth Fault included in the control unit

OTHERS PROTECTIONS

- Emergency stop button
- Panel protected through door with lockable handle

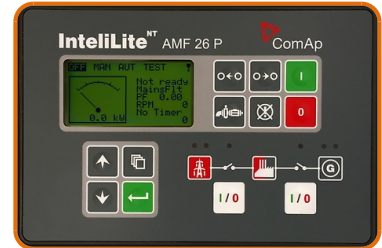

ACP - Basic Configurations Available:

| POWER PANEL - BREAKERS AVAILABLE: | | |
|--|---|----------|
| GCB1 - Genset Circuit Breaker 3-pole | A | 3200 |
| GCB2 - Genset Circuit Breaker 4-pole | A | 3200 |
| ETB - External Terminal Board (with GCB) | | Standard |
| RCG - Various Supplement for Remote Control | | • |
| TLP - Various supplements for remote signals | | • |
| CAH - Control Panel Anti-Condensation Heater (ACP) | | • |
| • : Supplement available | | . |
| Other Configurations and-or special versions available on requests | | . |



MPP - Modular parallel panel

Mounted on the genset, complete with digital control unit Intelvision5 for monitoring, control, protection and load sharing for both single and multiple gen-sets operating in standby or parallel modes (up to 32 gen-sets in island).

DIGITAL INSTRUMENTATION (Graphical display 320x240 pixels)

- Mains: voltage, Intensity, Frequency.
- Mains kW - kVAr -Power factor Cos f.
- Generating set voltage (3 phases).
- Generating set frequency.
- Generating set current (3 phases).
- Generating set Power (kVA - kW - kVAr - Cos f).
- Generating set kWh and kVAh.
- Battery voltage.
- Hours-counter.
- Engine speed r.p.m.
- Fuel level (%).
- Engine temperature - Oil pressure

COMMAND AND OTHERS

- Operation modes: OFF - AMF function - Single Parallel to mains Island application - Single Parallel to Mains AMF application - Multiple parallel genset Island application.
- Pushbutton for forcing Mains Breaker/contact or Genset Breaker/contact.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Multiple parallel and Power Management operation with digital load AVR sharing.
- Automatic synchronizing and power control (via speed governor or ECU)
- Baseload Import/Export and Peak shaving
- Voltage and PF control (AVR).
- Configurable digital I/O (12/12) and analogue inputs (3).
- Integrate PLC programmable functions.
- Event-based history (up to 500records).
- Selectable measurement range 120/277V and 0-1/0-5A.
- Remote starting and Blocking signal availability.
- DC system disconnection switch.
- Acoustic alarm.
- Automatic battery charger.
- 2xRS232/RS485/USB Comuncation ports.
- Multi-pin connetor (in and out) for parallel with other generators

PROTECTION

- Engine protections: low fuel level, low oil pressure, high engine temperature.
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage
- Others: overcurrent, shortcircuit, reverse power, Earth fault
- Emergency stop button.
- Panel protected through door with lochetable handle



MPP - Basic Configurations Available:

| POWER PANEL - BREAKERS AVAILABLE: | | |
|--|---|----------|
| GMB1 - Genset Circuit Breaker 3-pole motorized | A | 3200 |
| GMB2 - Genset Circuit Breaker 4-pole motorized | A | 3200 |
| ETB - External Terminal Board (with GMB) | | Standard |
| RCG - Various Supplement fof Remote Control | | • |
| TLP - Various supplements for remote signals | | • |
| CAH - Control Panel Anti-Condensation Heater (MPP) | | • |
| • : Supplement available | | . |
| Other Configurations and-or special versions available on requests | | . |



Accessories

Items available as accessory equipment

LTS - LOAD TRANSFER SWITCH - Accessories ACP

The Load Transfer Switch (LTS) panel operates the power supply changeover between the generator and the Mains in backup applications, guarantying the feeding to the load within a short period of time.

It consists of a standalone cabinet which can be installed separate from the generating set. The logic control of the power supply changeover is operated by means of the Automatic Control panel mounted on the generating set, so therefore none logic device is required on the LTS panel.

Main features

The enclosure is made of metal sheet folded and painted with high-resistance epoxy powder, guarantying external IP40 and internal IP20. Standard color is RAL7035. The lower side of the panel presents a removable plate for power cables connection.

The front door presents an emergency push-button to stop of the generator. Inside the enclosure it is provided a lever which allows a manual selection of the power supply between the generator and the Mains (I-0-II).

According to the changeover control signal, the power supply is transferred from one source to the other by means of two motorized IV-poles change-over switches. A mechanical and electrical interlocking prevents both power sources to be connected at the same time, avoiding any damage for the load or the alternator.



NOMINAL CURRENT & DIMENSIONS PANEL LTS (standard*)

| | | |
|-----------------|--------|------|
| Nominal Current | A | 3150 |
| Width | (W) mm | 1000 |
| Height | (H) mm | 1900 |
| Depth | (D) mm | 1000 |
| Weight | Kg | 420 |

* = Available electrical power more

